



Cold Magic High Performance Fan Coil Unit



CHH06-4R制冷参数表 CHH06-4R Cooling Performance Table

CHH06-4R			22°C / 50.0%							23°C / 50.0%							24°C / 50.0%						
进/出水温 Water Inlet/ Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop			
			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.					
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/h	kPa			

CHH06-4R			25°C / 50.0%							26°C / 50.0%							27°C / 50.0%						
进/出水温 Water Inlet/ Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop	制冷量		出风温度		水流量 Water Flow	水压降 Water Pressure Drop			
			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.			Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.					
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa			

CHH06-4R制热参数表 CHH06-4R Heating Performance Table

CHH06-4R			20°C				21°C				22°C			
进/出水温 Water Inlet/ Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量		出风温度	水流量		水压降 Water Pressure Drop	制热量		出风温度	水流量		水压降 Water Pressure Drop
			Cooling Capacity	Air Outlet Temp.		Water Flow	Water Pressure Drop		Cooling Capacity	Air Outlet Temp.		Water Flow	Water Pressure Drop	
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa

CHH06-4R			23°C				24°C				25°C			
进/出水温 Water Inlet/ Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量		出风温度	水流量		水压降 Water Pressure Drop	制热量		出风温度	水流量		水压降 Water Pressure Drop
			Cooling Capacity	Air Outlet Temp.		Water Flow	Water Pressure Drop		Cooling Capacity	Air Outlet Temp.		Water Flow	Water Pressure Drop	
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa

CHH10-4R制冷参数表 CHH10-4R Cooling Performance Table

Table with columns for indoor/outdoor temperature, fan speed, airflow, cooling capacity, sensible heat, air outlet temperature, humidity, water flow, pressure drop, and cooling/heating capacity at 22°C, 23°C, and 24°C.

Table with columns for indoor/outdoor temperature, fan speed, airflow, cooling capacity, sensible heat, air outlet temperature, humidity, water flow, pressure drop, and cooling/heating capacity at 25°C, 26°C, and 27°C.

CHH10-4R制热参数表 CHH10-4R Heating Performance Table

Table with columns for indoor/outdoor temperature, fan speed, airflow, cooling capacity, air outlet temperature, water flow, pressure drop, and heating capacity at 20°C, 21°C, and 22°C.

Table with columns for indoor/outdoor temperature, fan speed, airflow, cooling capacity, air outlet temperature, water flow, pressure drop, and heating capacity at 23°C, 24°C, and 25°C.

CHH12-6R制冷参数表 CHH12-6R Cooling Performance Table

Table with 4 main columns for temperature/condition: 22°C / 50.0%, 23°C / 50.0%, 24°C / 50.0%. Sub-columns include: Inlet/Outlet Temp., Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp., Air Outlet RH., Water Flow, Water Pressure Drop.

Table with 4 main columns for temperature/condition: 25°C / 50.0%, 26°C / 50.0%, 27°C / 50.0%. Sub-columns include: Inlet/Outlet Temp., Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp., Air Outlet RH., Water Flow, Water Pressure Drop.

CHH12-6R制热参数表 CHH12-6R Heating Performance Table

Table with 3 main columns for temperature: 20°C, 21°C, 22°C. Sub-columns include: Inlet/Outlet Temp., Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp., Water Flow, Water Pressure Drop.

Table with 3 main columns for temperature: 23°C, 24°C, 25°C. Sub-columns include: Inlet/Outlet Temp., Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp., Water Flow, Water Pressure Drop.

CHH14-4R制冷参数表 CHH14-4R Cooling Performance Table

Table with columns for Cooling Capacity, Sensible Heat, Air Outlet Temp, RH, Water Flow, and Water Pressure Drop for temperatures 22°C / 50.0%, 23°C / 50.0%, and 24°C / 50.0%.

Table with columns for Cooling Capacity, Sensible Heat, Air Outlet Temp, RH, Water Flow, and Water Pressure Drop for temperatures 25°C / 50.0%, 26°C / 50.0%, and 27°C / 50.0%.

CHH14-4R制热参数表 CHH14-4R Heating Performance Table

Table with columns for Heating Capacity, Air Outlet Temp, Water Flow, and Water Pressure Drop for temperatures 20°C, 21°C, and 22°C.

Table with columns for Heating Capacity, Air Outlet Temp, Water Flow, and Water Pressure Drop for temperatures 23°C, 24°C, and 25°C.



CHH14-5R制冷参数表 CHH14-5R Cooling Performance Table

Table with 17 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop. Rows include various conditions like 5.0/10.0 High, 7.0/12.0 High, etc.

Table with 17 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop. Rows include various conditions like 5.0/10.0 High, 7.0/12.0 High, etc.

CHH14-5R制热参数表 CHH14-5R Heating Performance Table

Table with 17 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop. Rows include various conditions like 40.0/30.0 High, 45.0/35.0 High, etc.

Table with 17 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop. Rows include various conditions like 40.0/30.0 High, 45.0/35.0 High, etc.



CHH16-4R制冷参数表 CHH16-4R Cooling Performance Table

Table with 19 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop. Rows include various indoor/outdoor temperature and humidity combinations.

Table with 19 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop, Cooling Capacity, Sensible Heat, Air Outlet Temp, Air Outlet RH, Water Flow, Water Pressure Drop. Rows include various indoor/outdoor temperature and humidity combinations.

CHH16-4R制热参数表 CHH16-4R Heating Performance Table

Table with 13 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop. Rows include various indoor/outdoor temperature combinations.

Table with 13 columns: Inlet/Outlet Temp, Fan Speed, Air Flow, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop, Cooling Capacity, Air Outlet Temp, Water Flow, Water Pressure Drop. Rows include various indoor/outdoor temperature combinations.

CHH18-5R制冷参数表 CHH18-5R Cooling Performance Table

CHH18-5R			22°C / 50.0%						23°C / 50.0%						24°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	2859	13.53	11.59	9.9	98	0.644	5.9	15.61	12.64	9.8	100	0.743	7.6	17.64	13.53	9.8	100	0.840	9.4
7.0/12.0	High	2859	10.34	9.35	12.3	88	0.493	3.6	11.27	9.56	13.0	86	0.537	4.2	13.29	11.29	12.2	95	0.633	5.6
9.0/14.0	High	2859	8.50	8.50	13.2	87	0.405	2.5	9.47	9.12	13.5	89	0.452	3.1	10.41	9.32	14.3	87	0.497	3.6
11.0/16.0	High	2859	6.53	6.53	15.2	77	0.312	1.6	7.58	7.58	15.1	83	0.362	2.0	8.58	8.58	15.0	88	0.410	2.5
13.0/18.0	High	2859	3.58	3.58	18.3	63	0.171	0.5	5.50	5.50	17.3	71	0.263	1.2	6.64	6.64	17.1	76	0.318	1.6
15.0/20.0	High	2859	2.21	2.21	19.7	58	0.106	0.2	2.90	2.90	20.0	61	0.139	0.4	3.59	3.59	20.2	63	0.172	0.5
5.0/10.0	Mid	2626	12.67	10.77	9.8	99	0.603	5.2	14.61	11.74	9.6	100	0.696	6.7	16.53	12.58	9.7	100	0.787	8.4
7.0/12.0	Mid	2626	9.61	8.65	12.2	88	0.458	3.2	10.48	8.84	12.9	86	0.499	3.7	12.45	10.51	12.0	95	0.593	5.0
9.0/14.0	Mid	2626	7.89	7.89	13.0	88	0.376	2.2	8.79	8.44	13.4	90	0.420	2.7	9.69	8.63	14.2	88	0.462	3.2
11.0/16.0	Mid	2626	6.03	6.03	15.2	77	0.288	1.4	7.03	7.03	15.0	83	0.336	1.8	7.98	7.98	14.9	88	0.381	2.2
13.0/18.0	Mid	2626	3.44	3.44	18.1	64	0.164	0.5	5.05	5.05	17.3	71	0.241	1.0	6.16	6.16	17.0	77	0.294	1.4
15.0/20.0	Mid	2626	2.13	2.13	19.6	58	0.102	0.2	2.79	2.79	19.8	61	0.133	0.3	3.44	3.44	20.1	64	0.165	0.5
5.0/10.0	Low	2574	12.48	10.60	9.7	99	0.594	5.1	14.40	11.55	9.6	100	0.686	6.6	16.28	12.37	9.6	100	0.775	8.2
7.0/12.0	Low	2574	9.46	8.50	12.2	88	0.451	3.1	10.31	8.69	12.9	86	0.491	3.6	12.26	10.33	12.0	95	0.585	4.9
9.0/14.0	Low	2574	7.76	7.76	13.0	88	0.370	2.2	8.65	8.30	13.4	90	0.413	2.6	9.53	8.48	14.1	88	0.455	3.1
11.0/16.0	Low	2574	5.92	5.92	15.1	77	0.283	1.3	6.92	6.92	15.0	83	0.330	1.7	7.84	7.84	14.9	89	0.375	2.2
13.0/18.0	Low	2574	3.40	3.40	18.1	64	0.163	0.5	4.94	4.94	17.3	71	0.236	1.0	6.05	6.05	17.0	77	0.289	1.4
15.0/20.0	Low	2574	2.11	2.11	19.6	58	0.101	0.2	2.76	2.76	19.8	61	0.132	0.3	3.41	3.41	20.0	64	0.163	0.5

CHH18-5R			25°C / 50.0%						26°C / 50.0%						27°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	2859	19.64	14.41	9.9	100	0.935	11.4	21.93	15.25	10.0	100	1.044	13.8	24.20	16.10	10.1	100	1.152	16.4
7.0/12.0	High	2859	15.38	12.35	12.1	97	0.733	7.3	17.75	13.38	12.0	98	0.846	9.4	20.07	14.36	11.9	100	0.957	11.7
9.0/14.0	High	2859	11.34	9.54	15.0	86	0.541	4.2	13.06	10.99	14.5	94	0.623	5.4	15.48	12.13	14.3	96	0.739	7.3
11.0/16.0	High	2859	9.54	9.27	15.3	90	0.456	3.1	10.48	9.24	16.3	86	0.500	3.6	11.45	10.10	16.4	91	0.547	4.2
13.0/18.0	High	2859	7.67	7.67	17.0	81	0.367	2.1	8.65	8.65	16.9	87	0.414	2.6	9.60	9.41	17.1	91	0.459	3.1
15.0/20.0	High	2859	5.65	5.65	19.1	71	0.270	1.2	6.74	6.74	18.9	77	0.323	1.6	7.75	7.75	18.9	82	0.371	2.1
5.0/10.0	Mid	2626	18.38	13.38	9.7	100	0.875	10.1	20.53	14.19	9.8	100	0.977	12.3	22.66	14.98	9.9	100	1.079	14.6
7.0/12.0	Mid	2626	14.40	11.49	11.9	97	0.687	6.5	16.63	12.46	11.8	99	0.793	8.4	18.82	13.38	11.7	100	0.897	10.4
9.0/14.0	Mid	2626	10.54	8.83	14.9	86	0.503	3.7	12.26	10.24	14.3	94	0.585	4.8	14.55	11.31	14.1	96	0.694	6.5
11.0/16.0	Mid	2626	8.87	8.58	15.2	90	0.424	2.7	9.75	8.56	16.2	86	0.466	3.2	10.75	9.42	16.2	91	0.514	3.8
13.0/18.0	Mid	2626	7.13	7.13	16.9	82	0.341	1.8	8.05	8.05	16.8	88	0.385	2.3	8.95	8.72	17.0	91	0.428	2.7
15.0/20.0	Mid	2626	5.21	5.21	19.0	71	0.249	1.0	6.26	6.26	18.8	77	0.300	1.4	7.22	7.22	18.7	83	0.345	1.8
5.0/10.0	Low	2574	18.13	13.18	9.7	100	0.863	9.9	20.12	13.96	9.7	100	0.963	12.0	22.32	14.73	9.8	100	1.063	14.2
7.0/12.0	Low	2574	14.21	11.31	11.8	97	0.677	6.3	16.39	12.25	11.7	99	0.781	8.2	18.54	13.15	11.6	100	0.884	10.1
9.0/14.0	Low	2574	10.39	8.69	14.9	86	0.496	3.6	12.09	10.07	14.2	94	0.577	4.7	14.34	11.12	14.0	96	0.684	6.4
11.0/16.0	Low	2574	8.74	8.44	15.2	90	0.417	2.6	9.59	8.41	16.2	86	0.458	3.1	10.60	9.26	16.2	91	0.506	3.7
13.0/18.0	Low	2574	7.02	7.02	16.8	82	0.336	1.8	7.92	7.92	16.8	88	0.379	2.2	8.80	8.56	17.0	91	0.421	2.6
15.0/20.0	Low	2574	5.12	5.12	19.0	71	0.245	1.0	6.15	6.15	18.8	77	0.295	1.4	7.10	7.10	18.7	83	0.340	1.8

CHH18-5R制热参数表 CHH18-5R Heating Performance Table

CHH18-5R			20°C				21°C				22°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	2854	12.71	33.2	0.307	1.3	11.68	33.1	0.282	1.2	10.63	33.1	0.256	1.0
45.0/35.0	High	2854	17.70	38.3	0.428	2.4	16.74	38.4	0.405	2.1	15.78	38.4	0.361	1.9
50.0/40.0	High	2854	22.42	43.2	0.543	3.5	21.49	43.3	0.520	3.2	20.55	43.4	0.498	3.0
55.0/45.0	High	2854	27.04	48.0	0.656	4.8	26.11	48.1	0.633	4.5	25.18	48.2	0.611	4.2
60.0/50.0	High	2854	31.59	52.7	0.768	6.2	30.66	52.8	0.745	5.9	29.73	52.9	0.723	5.5
65.0/55.0	High	2854	36.10	57.4	0.879	7.7	35.17	57.5	0.856	7.3	34.24	57.6	0.834	7.0
40.0/30.0	Mid	2616	11.84	33.4	0.286	1.2	10.87	33.3	0.262	1.0	9.89	33.2	0.239	0.9
45.0/35.0	Mid	2616	16.48	38.6	0.398	2.1	15.59	38.7	0.377	1.9	14.71	38.7	0.356	1.7
50.0/40.0	Mid	2616	20.87	43.6	0.505	3.1	19.99	43.7	0.484	2.9	19.14	43.7	0.463	2.6
55.0/45.0	Mid	2616	25.15	48.5	0.610	4.2	24.27	48.5	0.589	3.9	23.43	48.6	0.568	3.7
60.0/50.0	Mid	2616	29.36	53.2	0.714	5.4	28.48	53.3	0.692	5.1	27.65	53.4	0.672	4.9
65.0/55.0	Mid	2616	33.54	57.9	0.817	6.7	32.66	58.0	0.795	6.4	31.82	58.1	0.775	6.1
40.0/30.0	Low	2570	11.64	33.4	0.281	1.2	10.70	33.4	0.258	1.0	9.74	33.3	0.235	0.8
45.0/35.0	Low	2570	16.21	38.7	0.392	2.0	15.34	38.7	0.371	1.8	14.48	38.8	0.350	1.7
50.0/40.0	Low	2570	20.51	43.7	0.497	3.0	19.68	43.8	0.476	2.8	18.83	43.8	0.456	2.6
55.0/45.0	Low	2570	24.71	48.5	0.599	4.1	23.88	48.6	0.579	3.8	23.05	48.7	0.559	3.6
60.0/50.0	Low	2570	28.85	53.3	0.701	5.3	28.03	53.4	0.681	5.0	27.20	53.5	0.661	4.7
65.0/55.0	Low	2570	32.95	58.1	0.802	6.5	32.13	58.2	0.782	6.2	31.31	58.2	0.762	6.0

CHH18-5R			23°C				24°C				25°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	2854	9.52	32.9	0.230	0.8	8.36	32.7	0.202	0.6	7.04	32.4	0.170	0.5
45.0/35.0	High	2854	14.80	38.4	0.358	1.7	13.83	38.5	0.334	1.5	12.84	38.4	0.310	1.3
50.0/40.0	High	2854	19.60	43.5	0.475	2.8	18.66	43.5	0.452	2.5	17.72	43.6	0.429	2.3
55.0/45.0	High													

CHH18-6R制冷参数表 CHH18-6R Cooling Performance Table

CHH18-6R			22°C / 50.0%						23°C / 50.0%						24°C / 50.0%					
进/出水温	风机档位	风量	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强
Water Inlet / Outlet Temp.	Fan Speed	Air Flow	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	2767	15.43	12.49	8.6	100	0.735	12.0	17.52	13.41	8.6	100	0.834	15.1	19.55	14.30	8.6	100	0.931	18.3
7.0/12.0	High	2767	11.23	9.68	11.6	89	0.535	6.8	13.18	11.21	10.9	97	0.628	9.0	15.32	12.26	10.8	99	0.730	11.7
9.0/14.0	High	2767	9.39	9.39	11.9	95	0.448	4.9	10.33	9.50	12.8	91	0.493	5.8	11.25	9.65	13.6	88	0.537	6.7
11.0/16.0	High	2767	7.47	7.47	14.0	83	0.357	3.2	8.47	8.47	13.9	89	0.404	4.0	9.42	9.42	13.8	94	0.450	4.9
13.0/18.0	High	2767	5.37	5.37	16.2	72	0.257	1.8	6.49	6.49	16.0	77	0.311	2.5	7.52	7.52	15.9	83	0.360	3.2
15.0/20.0	High	2767	2.63	2.63	19.2	60	0.126	0.5	3.52	3.52	19.2	63	0.169	0.8	5.46	5.46	18.1	72	0.262	1.8
5.0/10.0	Mid	2499	14.24	11.43	8.4	100	0.678	10.4	16.15	12.26	8.4	100	0.769	13.0	18.03	13.10	8.3	100	0.858	15.8
7.0/12.0	Mid	2499	10.28	8.82	11.5	89	0.490	5.8	12.16	10.26	10.7	98	0.580	7.8	14.15	11.24	10.6	99	0.675	10.2
9.0/14.0	Mid	2499	8.59	8.56	11.8	95	0.410	4.2	9.45	8.64	12.7	91	0.451	5.0	10.31	8.79	13.5	89	0.482	5.8
11.0/16.0	Mid	2499	6.83	6.83	13.9	84	0.326	2.8	7.75	7.75	13.7	89	0.370	3.4	8.63	8.63	13.7	95	0.412	4.2
13.0/18.0	Mid	2499	4.88	4.88	16.2	72	0.233	1.5	5.93	5.93	15.9	78	0.284	2.1	6.89	6.89	15.8	83	0.329	2.8
15.0/20.0	Mid	2499	2.50	2.50	19.0	60	0.120	0.5	3.24	3.24	19.1	64	0.155	0.7	4.98	4.98	18.0	72	0.239	1.5
5.0/10.0	Low	2442	13.96	11.18	8.3	100	0.665	10.1	15.85	12.02	8.3	100	0.755	12.6	17.68	12.82	8.3	100	0.842	15.3
7.0/12.0	Low	2442	10.06	8.62	11.5	89	0.480	5.6	11.94	10.06	10.7	98	0.569	7.6	13.88	11.00	10.5	99	0.661	9.9
9.0/14.0	Low	2442	8.41	8.37	11.8	95	0.401	4.0	9.27	8.46	12.7	91	0.442	4.8	10.09	8.60	13.5	89	0.482	5.6
11.0/16.0	Low	2442	6.69	6.69	13.8	84	0.319	2.7	7.59	7.59	13.7	90	0.363	3.3	8.45	8.45	13.6	95	0.404	4.0
13.0/18.0	Low	2442	4.77	4.77	16.2	72	0.228	1.4	5.81	5.81	15.9	78	0.278	2.1	6.74	6.74	15.7	83	0.322	2.7
15.0/20.0	Low	2442	2.47	2.47	19.0	60	0.118	0.4	3.20	3.20	19.1	64	0.153	0.7	4.87	4.87	18.0	72	0.233	1.5

CHH18-6R			25°C / 50.0%						26°C / 50.0%						27°C / 50.0%					
进/出水温	风机档位	风量	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强	制冷量	显热量	出风温度	出风相对湿度	水流量	水压强
Water Inlet / Outlet Temp.	Fan Speed	Air Flow	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop	Cooling Capacity	Sensible Heat	Air Outlet Temp.	Air Outlet RH.	Water Flow	Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	2767	21.56	15.18	8.6	100	1.026	21.7	23.88	16.04	8.6	100	1.137	26.0	26.18	16.90	8.6	100	1.246	30.5
7.0/12.0	High	2767	17.41	13.26	10.6	100	0.830	14.7	19.80	14.17	10.6	100	0.944	18.4	22.14	15.05	10.7	100	1.055	22.4
9.0/14.0	High	2767	12.57	10.78	13.3	94	0.600	8.2	15.11	11.94	13.1	96	0.721	11.3	17.55	13.00	12.9	98	0.837	14.7
11.0/16.0	High	2767	10.36	9.61	14.6	92	0.495	5.7	11.28	9.55	15.7	88	0.539	6.7	13.43	11.08	15.0	96	0.642	9.1
13.0/18.0	High	2767	8.50	8.50	15.8	88	0.407	4.0	9.46	9.46	15.7	94	0.452	4.8	10.39	9.66	16.5	92	0.497	5.7
15.0/20.0	High	2767	6.55	6.55	17.9	76	0.314	2.5	7.57	7.57	17.8	82	0.362	3.2	8.54	8.54	17.7	88	0.409	4.0
5.0/10.0	Mid	2499	19.87	13.90	8.3	100	0.946	18.8	22.01	14.71	8.4	100	1.048	22.5	24.10	15.48	8.4	100	1.147	26.4
7.0/12.0	Mid	2499	16.06	12.13	10.5	100	0.766	12.8	18.27	12.96	10.5	100	0.871	16.0	20.40	13.76	10.5	100	0.973	19.4
9.0/14.0	Mid	2499	11.64	9.89	13.1	95	0.555	7.1	13.99	10.96	12.9	97	0.668	9.9	16.23	11.92	12.7	98	0.774	12.8
11.0/16.0	Mid	2499	9.49	8.75	14.5	92	0.453	4.9	10.34	8.70	15.6	88	0.494	5.7	12.44	10.16	14.8	96	0.594	7.9
13.0/18.0	Mid	2499	7.79	7.79	15.7	89	0.372	3.4	8.67	8.67	15.6	95	0.415	4.2	9.52	8.80	16.4	92	0.455	4.9
15.0/20.0	Mid	2499	6.00	6.00	17.8	77	0.287	2.1	6.94	6.94	17.7	83	0.328	2.8	7.83	7.83	17.6	89	0.375	3.4
5.0/10.0	Low	2442	19.50	13.62	8.3	100	0.928	18.2	21.60	14.42	8.3	100	1.022	21.7	23.64	15.18	8.3	100	1.126	25.5
7.0/12.0	Low	2442	15.77	11.88	10.4	100	0.752	12.4	17.93	12.70	10.4	100	0.855	15.5	20.03	13.48	10.4	100	0.955	18.8
9.0/14.0	Low	2442	11.44	9.70	13.1	95	0.546	6.9	13.75	10.75	12.8	97	0.656	9.6	15.94	11.69	12.6	98	0.761	12.4
11.0/16.0	Low	2442	9.30	8.57	14.5	92	0.444	4.8	10.14	8.52	15.5	88	0.484	5.5	12.22	9.96	14.7	96	0.584	7.7
13.0/18.0	Low	2442	7.64	7.64	15.6	89	0.365	3.3	8.50	8.50	15.6	95	0.406	4.0	9.33	8.61	16.4	92	0.446	4.7
15.0/20.0	Low	2442	5.88	5.88	17.8	77	0.281	2.1	6.80	6.80	17.7	83	0.326	2.7	7.67	7.67	17.6	89	0.367	3.3

CHH18-6R制热参数表 CHH18-6R Heating Performance Table

CHH18-6R			20°C				21°C				22°C			
进/出水温	风机档位	风量	制热量	出风温度	水流量	水压强	制热量	出风温度	水流量	水压强	制热量	出风温度	水流量	水压强
Water Inlet / Outlet Temp.	Fan Speed	Air Flow	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	2763	13.99	35.0	0.337	2.6	12.98	34.9	0.313	2.3	11.94	34.8	0.288	2.0
45.0/35.0	High	2763	18.91	40.3	0.457	4.3	17.95	40.3	0.434	3.9	16.98	40.3	0.410	3.5
50.0/40.0	High	2763	23.62	45.3	0.572	6.2	22.68	45.3	0.549	5.8	21.73	45.4	0.526	5.4
55.0/45.0	High	2763	28.24	50.3	0.685	8.4	27.30	50.3	0.662	7.9	26.36	50.3	0.639	7.4
60.0/50.0	High	2763	32.80	55.1	0.797	10.7	31.86	55.2	0.774	10.1	30.92	55.2	0.751	9.6
65.0/55.0	High	2763	37.33	60.0	0.909	13.2	36.38	60.0	0.886	12.6	35.44	60.1	0.863	12.0
40.0/30.0	Mid	2495	12.83	35.2	0.310	2.2	11.90	35.2	0.287	1.9	10.97	35.1	0.265	1.7
45.0/35.0	Mid	2495	17.33	40.6	0.419	3.7	16.45	40.6	0.398	3.4	15.58	40.6	0.377	3.0
50.0/40.0	Mid	2495	21.62	45.7	0.523	5.3	20.76	45.7	0.502	5.0	19.91	45.7	0.482	4.6
55.0/45.0	Mid	2495	25.82	50.7	0.626	7.1	24.96	50.7	0.605	6.7	24.13	50.7	0.585	6.3
60.0/50.0	Mid	2495	29.96	55.6	0.728	9.1	29.11	55.6	0.707	8.7	28.28	55.7	0.687	8.2
65.0/55.0	Mid	2495	34.08	60.5	0.830	11.2	33.22	60.5	0.809	10.7	32.39	60.6	0.789	10.3
40.0/30.0	Low	2438	12.58	35.3	0.303	2.1	11.66	35.2	0.281	1.9	10.74	35.1	0.259	1.6
45.0/35.0	Low	2438	16.98	40.7	0.410	3.5	16.11	40.6	0.389	3.2	15.26	40.6	0.369	2.9
50.0/40.0	Low	2438	21.18	45.8	0.513	5.1	20.32	45.8	0.492	4.8	19.49	45.8	0.472	4.4
55.0/45.0	Low	2438	25.29	50.8	0.613	6.9	24.43	50.8	0.593	6.5	23.61	50.8	0.573	6.1
60.0/50.0	Low	2438	29.35	55.7	0.713	8.8	28.49	55.7	0.692	8.3	27.67	55.8	0.673	7.9
65.0/55.0	Low	2438	33.37	60.6	0.813	10.8	32.51	60.6	0.792	10.3	31.69	60.7	0.772	9.9

CHH18-6R			23°C				24°C				25°C			
进/出水温	风机档位	风量	制热量	出风温度	水流量	水压强	制热量	出风温度	水流量	水压强	制热量	出风温度	水流量	水压强
Water Inlet / Outlet Temp.	Fan Speed	Air Flow	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop	Cooling Capacity	Air Outlet Temp.	Water Flow	Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	2763	10.88	34.7	0.263	1.7	9.77	34.6	0.236	1.4	8.61	34.3	0.208	1.1
45.0/35.0	High	2763	16.01	40.3	0.387	3.2	15.02	40.2						

CHH20-4R制冷参数表 CHH20-4R Cooling Performance Table

CHH20-4R			22°C / 50.0%						23°C / 50.0%						24°C / 50.0%					
进/出水温 Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	3595	16.05	14.03	10.4	97	0.764	28.3	18.27	15.15	10.4	98	0.870	35.5	20.47	16.24	10.5	100	0.974	43.4
7.0/12.0	High	3595	12.23	11.15	12.8	86	0.583	17.3	13.69	12.59	12.6	92	0.653	21.1	15.96	13.78	12.5	94	0.761	27.7
9.0/14.0	High	3595	10.18	10.18	13.6	85	0.486	12.4	11.23	10.91	14.0	87	0.536	14.7	12.26	11.10	14.8	85	0.585	17.2
11.0/16.0	High	3595	8.08	8.08	15.3	77	0.386	8.1	9.16	9.16	15.4	81	0.438	10.2	10.22	10.22	15.5	85	0.488	12.3
13.0/18.0	High	3595	5.89	5.89	17.1	68	0.281	4.6	7.03	7.03	17.2	72	0.336	6.3	8.13	8.13	17.2	75	0.389	8.1
15.0/20.0	High	3595	3.30	3.30	19.3	59	0.158	1.6	4.73	4.73	19.1	64	0.227	3.1	5.94	5.94	19.1	68	0.284	4.6
5.0/10.0	Mid	3353	15.31	13.29	10.2	97	0.729	26.0	17.43	14.35	10.2	99	0.830	32.7	19.51	15.37	10.3	100	0.929	39.9
7.0/12.0	Mid	3353	11.60	10.52	12.7	86	0.553	15.8	13.07	11.93	12.4	93	0.623	19.5	15.22	13.04	12.4	94	0.725	25.4
9.0/14.0	Mid	3353	9.66	9.66	13.4	86	0.461	11.3	10.65	10.30	13.9	88	0.508	13.4	11.63	10.47	14.7	86	0.555	15.6
11.0/16.0	Mid	3353	7.67	7.67	15.2	77	0.367	7.4	8.70	8.70	15.3	82	0.415	9.3	9.69	9.69	15.4	86	0.463	11.2
13.0/18.0	Mid	3353	5.59	5.59	17.0	68	0.267	4.2	6.67	6.67	17.1	72	0.319	5.7	7.71	7.71	17.1	76	0.369	7.4
15.0/20.0	Mid	3353	2.25	2.25	20.0	57	0.108	0.8	4.49	4.49	19.0	64	0.215	2.8	5.64	5.64	19.0	68	0.270	4.2
5.0/10.0	Low	3222	14.90	12.87	10.1	98	0.709	24.8	16.96	13.91	10.1	99	0.807	31.2	18.98	14.87	10.2	100	0.903	38.0
7.0/12.0	Low	3222	11.25	10.16	12.6	86	0.536	14.9	12.73	11.57	12.3	93	0.607	18.6	14.81	12.64	12.3	95	0.706	24.3
9.0/14.0	Low	3222	9.37	9.37	13.4	86	0.447	10.7	10.33	9.96	13.8	88	0.493	12.7	11.28	10.12	14.6	86	0.538	14.8
11.0/16.0	Low	3222	7.45	7.45	15.1	78	0.356	7.0	8.44	8.44	15.2	82	0.403	8.8	9.40	9.40	15.3	86	0.449	10.6
13.0/18.0	Low	3222	5.42	5.42	17.0	68	0.259	4.0	6.48	6.48	17.0	72	0.310	5.5	7.49	7.49	17.1	76	0.358	7.0
15.0/20.0	Low	3222	2.20	2.20	20.0	57	0.105	0.8	4.36	4.36	19.0	64	0.209	2.7	5.47	5.47	18.9	68	0.262	4.0

CHH20-4R			25°C / 50.0%						26°C / 50.0%						27°C / 50.0%					
进/出水温 Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	3595	22.64	17.25	10.6	100	1.078	51.9	25.20	18.19	10.8	100	1.200	62.6	27.63	19.08	11.0	100	1.315	73.6
7.0/12.0	High	3595	18.22	14.93	12.6	95	0.869	34.9	20.70	16.00	12.7	97	0.987	43.7	23.33	16.84	12.9	96	1.112	54.0
9.0/14.0	High	3595	13.29	11.33	15.6	83	0.634	19.8	15.47	13.29	14.9	93	0.738	25.9	16.04	14.50	14.9	95	0.861	33.9
11.0/16.0	High	3595	11.26	11.05	15.8	87	0.538	14.6	12.29	10.98	16.8	84	0.587	17.0	13.79	12.34	16.7	90	0.659	20.9
13.0/18.0	High	3595	9.20	9.20	17.3	79	0.440	10.1	10.25	10.25	17.4	84	0.490	12.2	11.29	11.20	17.6	88	0.540	14.5
15.0/20.0	High	3595	7.08	7.08	19.1	71	0.339	6.3	8.17	8.17	19.2	76	0.391	8.1	9.23	9.23	19.3	80	0.442	10.1
5.0/10.0	Mid	3353	21.58	16.28	10.5	100	1.027	47.6	23.97	17.17	10.6	100	1.141	57.3	26.39	18.05	10.8	100	1.266	67.9
7.0/12.0	Mid	3353	17.35	14.12	12.4	96	0.827	32.0	19.83	15.19	12.4	97	0.945	40.5	22.10	16.14	12.5	98	1.053	49.1
9.0/14.0	Mid	3353	12.60	10.69	15.5	83	0.601	18.0	14.79	12.60	14.7	93	0.706	23.9	17.23	13.74	14.7	95	0.822	31.3
11.0/16.0	Mid	3353	10.68	10.43	15.7	88	0.510	13.3	11.66	10.36	16.7	84	0.557	15.5	13.14	11.68	16.5	90	0.627	19.2
13.0/18.0	Mid	3353	8.73	8.73	17.2	80	0.417	9.2	9.73	9.73	17.3	85	0.465	11.2	10.70	10.54	17.6	88	0.512	13.2
15.0/20.0	Mid	3353	6.72	6.72	19.0	72	0.321	5.7	7.75	7.75	19.1	76	0.371	7.4	8.76	8.76	19.1	81	0.419	9.2
5.0/10.0	Low	3222	20.98	15.75	10.4	100	0.999	45.4	23.31	16.61	10.5	100	1.109	54.5	25.62	17.46	10.7	100	1.220	64.4
7.0/12.0	Low	3222	16.87	13.68	12.3	96	0.804	30.5	19.26	14.70	12.3	97	0.918	38.5	21.60	15.68	12.4	99	1.029	47.1
9.0/14.0	Low	3222	12.22	10.33	15.4	84	0.583	17.1	14.41	12.22	14.6	93	0.688	22.8	16.78	13.32	14.6	95	0.800	29.8
11.0/16.0	Low	3222	10.36	10.08	15.6	88	0.495	12.6	11.30	10.01	16.7	84	0.540	14.7	12.78	11.31	16.4	91	0.611	18.3
13.0/18.0	Low	3222	8.47	8.47	17.1	80	0.405	8.7	9.43	9.43	17.2	85	0.451	10.6	10.38	10.18	17.5	88	0.496	12.5
15.0/20.0	Low	3222	6.52	6.52	18.9	72	0.312	5.4	7.52	7.52	19.0	76	0.360	7.0	8.50	8.50	19.1	81	0.407	8.7

CHH20-4R制热参数表 CHH20-4R Heating Performance Table

CHH20-4R			20°C				21°C				22°C			
进/出水温 Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	3590	14.89	32.3	0.359	6.3	13.77	32.4	0.332	5.5	12.64	32.5	0.305	4.7
45.0/35.0	High	3590	20.36	36.8	0.492	10.7	19.28	36.9	0.466	9.7	18.20	37.1	0.440	8.8
50.0/40.0	High	3590	25.67	41.1	0.622	15.8	24.60	41.3	0.596	14.6	23.54	41.5	0.570	13.6
55.0/45.0	High	3590	30.91	45.5	0.750	21.5	29.83	45.6	0.724	20.2	28.78	45.8	0.698	18.9
60.0/50.0	High	3590	36.09	49.7	0.877	27.7	35.01	49.9	0.851	26.2	33.96	50.1	0.825	24.9
65.0/55.0	High	3590	41.25	54.0	1.004	34.4	40.17	54.2	0.978	32.9	39.11	54.4	0.952	31.3
40.0/30.0	Mid	3350	14.14	32.5	0.341	5.8	13.09	32.6	0.316	5.0	12.02	32.7	0.290	4.3
45.0/35.0	Mid	3350	19.31	37.1	0.467	9.8	18.30	37.2	0.442	8.9	17.28	37.3	0.418	8.0
50.0/40.0	Mid	3350	24.33	41.5	0.589	14.4	23.33	41.6	0.565	13.3	22.33	41.8	0.541	12.4
55.0/45.0	Mid	3350	29.28	45.9	0.711	19.5	28.28	46.0	0.686	18.4	27.28	46.2	0.662	17.2
60.0/50.0	Mid	3350	34.18	50.2	0.831	25.2	33.18	50.4	0.806	23.9	32.18	50.5	0.782	22.6
65.0/55.0	Mid	3350	39.05	54.5	0.951	31.3	38.05	54.7	0.926	29.9	37.05	54.9	0.902	28.5
40.0/30.0	Low	3220	13.74	32.6	0.331	5.5	12.71	32.7	0.307	4.8	11.67	32.8	0.282	4.1
45.0/35.0	Low	3220	18.75	37.2	0.453	9.3	17.77	37.3	0.429	8.4	16.77	37.5	0.405	7.6
50.0/40.0	Low	3220	23.62	41.7	0.572	13.6	22.64	41.8	0.548	12.7	21.66	42.0	0.525	11.7
55.0/45.0	Low	3220	28.40	46.1	0.689	18.5	27.43	46.2	0.665	17.4	26.45	46.4	0.642	16.3
60.0/50.0	Low	3220	33.15	50.4	0.806	23.8	32.18	50.6	0.78					

CHH20-5R制冷参数表 CHH20-5R Cooling Performance Table

CHH20-5R			22°C / 50.0%						23°C / 50.0%						24°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	3454	16.36	14.02	9.9	98	0.779	8.9	18.79	15.24	9.9	100	0.895	11.3	21.16	16.28	9.9	100	1.007	13.9
7.0/12.0	High	3454	12.49	11.26	12.3	87	0.595	5.4	13.62	12.38	12.3	93	0.649	6.3	16.13	13.69	12.2	95	0.769	8.5
9.0/14.0	High	3454	10.32	10.32	13.1	88	0.492	3.8	11.45	11.01	13.5	89	0.546	4.6	12.56	11.22	14.3	87	0.599	5.4
11.0/16.0	High	3454	8.05	8.05	15.1	78	0.385	2.4	9.25	9.25	15.0	83	0.442	3.1	10.40	10.40	15.0	88	0.497	3.8
13.0/18.0	High	3454	5.50	5.50	17.3	67	0.263	1.2	6.91	6.91	17.0	72	0.330	1.8	8.15	8.15	17.0	77	0.390	2.5
15.0/20.0	High	3454	2.51	2.51	19.8	58	0.120	0.3	3.31	3.31	20.1	60	0.159	0.5	5.67	5.67	19.1	67	0.271	1.3
5.0/10.0	Mid	3234	15.59	13.27	9.8	98	0.742	8.1	17.89	14.42	9.7	100	0.852	10.4	20.16	15.41	9.8	100	0.960	12.8
7.0/12.0	Mid	3234	11.83	10.62	12.2	88	0.564	4.9	12.97	11.72	12.2	93	0.618	5.8	15.37	12.97	12.0	95	0.733	7.8
9.0/14.0	Mid	3234	9.78	9.78	13.0	88	0.467	3.5	10.84	10.38	13.4	89	0.517	4.2	11.90	10.59	14.2	87	0.568	4.9
11.0/16.0	Mid	3234	7.62	7.62	15.0	78	0.364	2.2	8.75	8.75	14.9	84	0.418	2.8	9.85	9.85	14.9	89	0.471	3.5
13.0/18.0	Mid	3234	5.15	5.15	17.3	67	0.246	1.1	6.52	6.52	17.0	72	0.312	1.7	7.72	7.72	16.9	77	0.369	2.2
15.0/20.0	Mid	3234	2.44	2.44	19.8	58	0.117	0.3	3.22	3.22	20.0	61	0.154	0.5	5.33	5.33	19.1	68	0.255	1.2
5.0/10.0	Low	3121	15.18	12.88	9.7	99	0.722	7.8	17.43	14.00	9.6	100	0.830	9.9	19.62	14.95	9.7	100	0.934	12.2
7.0/12.0	Low	3121	11.48	10.29	12.2	88	0.547	4.7	12.64	11.38	12.1	94	0.602	5.5	14.96	12.59	11.9	96	0.713	7.5
9.0/14.0	Low	3121	9.49	9.49	13.0	88	0.453	3.3	10.53	10.07	13.4	90	0.503	4.0	11.55	10.26	14.2	87	0.551	4.7
11.0/16.0	Low	3121	7.39	7.39	15.0	79	0.353	2.1	8.50	8.50	14.9	84	0.406	2.7	9.56	9.56	14.8	89	0.457	3.3
13.0/18.0	Low	3121	4.95	4.95	17.3	67	0.237	1.0	6.33	6.33	17.0	73	0.303	1.6	7.49	7.49	16.8	78	0.358	2.1
15.0/20.0	Low	3121	2.41	2.41	19.7	58	0.115	0.3	3.17	3.17	20.0	61	0.152	0.5	5.15	5.15	19.1	68	0.247	1.1

CHH20-5R			25°C / 50.0%						26°C / 50.0%						27°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	3454	23.49	17.31	10.0	100	1.118	16.7	26.20	18.30	10.1	100	1.247	20.3	28.86	19.29	10.2	100	1.374	24.1
7.0/12.0	High	3454	18.55	14.90	12.1	96	0.884	10.9	21.33	16.11	12.0	98	1.016	13.9	24.04	17.25	12.0	99	1.146	17.2
9.0/14.0	High	3454	13.64	11.47	15.1	85	0.651	6.3	15.79	13.29	14.5	94	0.753	8.1	18.59	14.59	14.3	96	0.887	10.8
11.0/16.0	High	3454	11.51	11.16	15.3	90	0.550	4.6	12.61	11.12	16.3	86	0.603	5.4	13.93	12.26	16.3	91	0.665	6.4
13.0/18.0	High	3454	9.32	9.32	16.9	81	0.446	3.1	10.46	10.46	16.9	87	0.500	3.8	11.57	11.31	17.2	90	0.553	4.6
15.0/20.0	High	3454	7.01	7.01	18.9	72	0.336	1.9	8.23	8.23	18.9	77	0.394	2.5	9.39	9.39	18.8	82	0.449	3.1
5.0/10.0	Mid	3234	22.37	16.37	9.8	100	1.065	15.4	24.93	17.31	9.9	100	1.187	18.6	27.46	18.25	10.0	100	1.307	22.0
7.0/12.0	Mid	3234	17.67	14.12	11.9	97	0.842	10.0	20.31	15.26	11.8	98	0.968	12.8	22.90	16.34	11.8	100	1.091	15.8
9.0/14.0	Mid	3234	12.92	10.83	15.0	86	0.617	5.7	15.06	12.59	14.3	94	0.719	7.5	17.75	13.84	14.1	96	0.847	10.0
11.0/16.0	Mid	3234	10.91	10.53	15.2	90	0.521	4.2	11.95	10.49	16.3	86	0.571	4.9	13.26	11.61	16.2	91	0.634	5.9
13.0/18.0	Mid	3234	8.83	8.83	16.8	82	0.422	2.8	9.91	9.91	16.8	87	0.474	3.5	10.96	10.66	17.1	90	0.524	4.2
15.0/20.0	Mid	3234	6.63	6.63	18.9	72	0.317	1.7	7.80	7.80	18.8	78	0.373	2.3	8.90	8.90	18.7	83	0.426	2.9
5.0/10.0	Low	3121	21.78	15.89	9.8	100	1.037	14.7	24.27	16.81	9.8	100	1.155	17.7	26.73	17.71	9.9	100	1.272	21.0
7.0/12.0	Low	3121	17.22	13.71	11.8	97	0.821	9.6	19.78	14.81	11.8	99	0.943	12.2	22.29	15.86	11.7	100	1.062	15.1
9.0/14.0	Low	3121	12.55	10.50	14.9	86	0.599	5.4	14.69	12.24	14.2	94	0.701	7.1	17.30	13.44	14.1	96	0.825	9.5
11.0/16.0	Low	3121	10.59	10.21	15.2	90	0.506	4.0	11.60	10.17	16.2	86	0.554	4.7	12.93	11.28	16.1	92	0.618	5.6
13.0/18.0	Low	3121	8.58	8.58	16.8	82	0.410	2.7	9.63	9.63	16.7	88	0.460	3.3	10.65	10.33	17.1	91	0.509	4.0
15.0/20.0	Low	3121	6.43	6.43	18.8	72	0.308	1.6	7.57	7.57	18.7	78	0.362	2.1	8.64	8.64	18.7	83	0.414	2.7

CHH20-5R制热参数表 CHH20-5R Heating Performance Table

CHH20-5R			20°C				21°C				22°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	3449	15.32	33.1	0.370	2.0	14.11	33.1	0.341	1.7	12.89	33.1	0.311	1.5
45.0/35.0	High	3449	21.17	38.2	0.512	3.5	20.04	38.2	0.484	3.2	18.90	38.3	0.457	2.8
50.0/40.0	High	3449	26.77	43.0	0.648	5.1	25.65	43.0	0.621	4.8	24.54	43.1	0.594	4.4
55.0/45.0	High	3449	32.25	47.7	0.782	7.0	31.14	47.8	0.755	6.6	30.03	47.9	0.729	6.2
60.0/50.0	High	3449	37.66	52.3	0.915	9.0	36.56	52.4	0.888	8.6	35.45	52.5	0.862	8.1
65.0/55.0	High	3449	43.04	56.9	1.048	11.2	41.93	57.0	1.021	10.7	40.82	57.2	0.994	10.2
40.0/30.0	Mid	3229	14.54	33.3	0.351	1.8	13.40	33.3	0.323	1.6	12.24	33.3	0.295	1.4
45.0/35.0	Mid	3229	20.08	38.4	0.485	3.2	19.01	38.5	0.460	2.9	17.93	38.5	0.434	2.6
50.0/40.0	Mid	3229	25.37	43.2	0.614	4.7	24.32	43.3	0.589	4.3	23.27	43.4	0.563	4.0
55.0/45.0	Mid	3229	30.55	48.0	0.741	6.4	29.50	48.1	0.716	6.0	28.46	48.2	0.690	5.6
60.0/50.0	Mid	3229	35.66	52.7	0.867	8.2	34.62	52.8	0.841	7.8	33.58	52.9	0.816	7.4
65.0/55.0	Mid	3229	40.74	57.3	0.992	10.2	39.69	57.4	0.966	9.7	38.64	57.5	0.941	9.3
40.0/30.0	Low	3117	14.13	33.4	0.341	1.7	13.03	33.4	0.314	1.5	11.89	33.3	0.287	1.3
45.0/35.0	Low	3117	19.51	38.5	0.471	3.0	18.48	38.6	0.447	2.7	17.42	38.6	0.421	2.5
50.0/40.0	Low	3117	24.64	43.4	0.597	4.4	23.63	43.5	0.572	4.1	22.60	43.6	0.547	3.8
55.0/45.0	Low	3117	29.66	48.2	0.720	6.0	28.66	48.3	0.695	5.7	27.63	48.4	0.670	5.3
60.0/50.0	Low	3117	34.62	52.9	0.841	7.8	33.62	53.0	0.817	7.4	32.58	53.1	0.792	7.0
65.0/55.0	Low	3117	39.54	57.5	0.963	9.7	38.53	57.7	0.938	9.2	37.50	57.8	0.913	8.8

CHH20-5R			23°C				24°C				25°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制热量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	3449	11.63	33.0	0.281	1.2	10.32	32.9	0.249	1.0	8.91	32.7	0.215	0.8
45.0/35.0	High	3449	17.75	38.3	0.429	2.5	16.60	38.4	0.401	2.3	15.42	38.4	0.373	2.0
50.0/40.0	High	3449	23.42	43.2	0.567	4.1	22.31	43.3	0.540					

CHH20-6R制冷参数表 CHH20-6R Cooling Performance Table

CHH20-6R			22°C / 50.0%						23°C / 50.0%						24°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa	kW	kW	°C	%	l/s	kPa
5.0/10.0	High	3332	18.46	14.97	8.6	100	0.879	17.7	20.92	16.06	8.6	100	0.996	22.1	23.32	17.10	8.7	100	1.110	26.7
7.0/12.0	High	3332	13.45	11.59	11.6	89	0.641	10.0	15.87	13.50	10.9	97	0.756	13.4	18.37	14.72	10.8	99	0.876	17.4
9.0/14.0	High	3332	11.27	11.26	11.9	95	0.538	7.2	12.39	11.38	12.8	91	0.591	8.6	13.48	11.56	13.6	88	0.643	9.9
11.0/16.0	High	3332	9.02	9.02	13.9	83	0.431	4.8	10.18	10.18	13.9	89	0.486	6.0	11.30	11.30	13.9	94	0.540	7.2
13.0/18.0	High	3332	6.61	6.61	16.1	72	0.316	2.8	7.88	7.88	15.9	78	0.377	3.8	9.06	9.06	15.9	83	0.433	4.8
15.0/20.0	High	3332	3.00	3.00	19.3	59	0.143	0.7	5.32	5.32	18.2	67	0.255	1.9	6.69	6.69	18.0	72	0.320	2.8
5.0/10.0	Mid	3131	17.62	14.21	8.5	100	0.839	16.3	19.95	15.23	8.5	100	0.950	20.3	22.23	16.23	8.5	100	1.058	24.6
7.0/12.0	Mid	3131	12.77	10.97	11.6	89	0.609	9.1	15.14	12.81	10.8	97	0.722	12.3	17.54	13.98	10.7	99	0.836	16.0
9.0/14.0	Mid	3131	10.70	10.66	11.9	95	0.511	6.6	11.76	10.76	12.8	91	0.561	7.8	12.80	10.93	13.6	88	0.611	9.1
11.0/16.0	Mid	3131	8.57	8.57	13.9	84	0.409	4.4	9.67	9.67	13.8	89	0.462	5.5	10.74	10.74	13.8	95	0.513	6.6
13.0/18.0	Mid	3131	6.28	6.28	16.0	73	0.300	2.5	7.48	7.48	15.9	78	0.358	3.4	8.61	8.61	15.8	83	0.412	4.4
15.0/20.0	Mid	3131	2.91	2.91	19.2	60	0.139	0.6	5.03	5.03	18.2	67	0.241	1.7	6.35	6.35	17.9	72	0.304	2.5
5.0/10.0	Low	3008	17.05	13.71	8.4	100	0.812	15.4	19.31	14.70	8.4	100	0.919	19.2	21.52	15.67	8.4	100	1.025	23.2
7.0/12.0	Low	3008	12.32	10.56	11.5	89	0.587	8.6	14.67	12.37	10.7	98	0.699	11.7	16.99	13.50	10.6	99	0.810	15.1
9.0/14.0	Low	3008	10.33	10.26	11.8	95	0.493	6.2	11.35	10.37	12.7	91	0.542	7.3	12.36	10.53	13.5	88	0.590	8.5
11.0/16.0	Low	3008	8.27	8.27	13.8	84	0.395	4.2	9.33	9.33	13.7	90	0.446	5.1	10.37	10.37	13.7	95	0.495	6.2
13.0/18.0	Low	3008	6.05	6.05	16.0	73	0.289	2.4	7.22	7.22	15.8	78	0.345	3.2	8.32	8.32	15.7	84	0.398	4.4
15.0/20.0	Low	3008	2.86	2.86	19.2	60	0.137	0.6	4.84	4.84	18.2	67	0.232	1.6	6.13	6.13	17.9	72	0.294	2.1

CHH20-6R			25°C / 50.0%						26°C / 50.0%						27°C / 50.0%					
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	显热量 Sensible Heat	出风温度 Air Outlet Temp.	出风相对湿度 Air Outlet RH.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa	kW	kW	°C	%	l/h	kPa
5.0/10.0	High	3332	25.70	18.15	8.7	100	1.223	31.7	28.44	19.16	8.7	100	1.354	37.9	31.16	20.17	8.8	100	1.483	44.5
7.0/12.0	High	3332	20.83	15.91	10.7	100	0.993	21.7	23.64	16.98	10.7	100	1.127	27.1	26.41	18.02	10.8	100	1.259	32.9
9.0/14.0	High	3332	15.12	12.97	13.3	94	0.721	12.2	18.08	14.32	13.1	96	0.863	16.7	20.94	15.56	13.0	98	0.999	21.6
11.0/16.0	High	3332	12.42	11.52	14.7	92	0.593	8.5	13.51	11.44	15.7	87	0.645	9.9	16.10	13.29	15.0	96	0.769	13.4
13.0/18.0	High	3332	10.22	10.22	15.8	88	0.489	6.0	11.34	11.34	15.8	94	0.542	7.2	12.44	11.56	16.6	92	0.595	8.4
15.0/20.0	High	3332	7.93	7.93	17.9	77	0.380	3.8	9.11	9.11	17.8	82	0.436	4.8	10.25	10.25	17.8	88	0.491	5.9
5.0/10.0	Mid	3131	24.49	17.22	8.5	100	1.166	29.1	27.09	18.19	8.6	100	1.290	34.8	29.65	19.13	8.6	100	1.411	40.8
7.0/12.0	Mid	3131	19.87	15.09	10.6	100	0.947	19.9	22.53	16.09	10.6	100	1.074	24.9	25.14	17.06	10.6	100	1.198	30.1
9.0/14.0	Mid	3131	14.45	12.32	13.2	94	0.690	11.2	17.27	13.60	13.0	97	0.824	15.4	19.98	14.77	12.8	98	0.954	19.9
11.0/16.0	Mid	3131	11.79	10.89	14.6	92	0.563	7.7	12.82	10.82	15.6	88	0.613	9.0	15.38	12.62	14.9	96	0.735	12.4
13.0/18.0	Mid	3131	9.71	9.71	15.7	88	0.464	5.4	10.77	10.77	15.7	94	0.515	6.5	11.81	10.93	16.5	92	0.565	7.7
15.0/20.0	Mid	3131	7.54	7.54	17.8	77	0.361	3.4	8.66	8.66	17.7	83	0.414	4.4	9.73	9.73	17.7	88	0.466	5.4
5.0/10.0	Low	3008	23.69	16.61	8.4	100	1.128	27.5	26.21	17.56	8.5	100	1.248	32.8	28.70	18.49	8.5	100	1.366	38.5
7.0/12.0	Low	3008	19.23	14.55	10.5	100	0.916	18.8	21.81	15.52	10.5	100	1.040	23.5	24.36	16.48	10.5	100	1.161	28.5
9.0/14.0	Low	3008	14.01	11.90	13.1	95	0.669	10.6	16.74	13.14	12.9	97	0.799	14.6	19.38	14.28	12.7	98	0.925	18.8
11.0/16.0	Low	3008	11.38	10.48	14.6	92	0.543	7.3	12.38	10.42	15.6	88	0.591	8.4	14.92	12.21	14.8	96	0.713	11.7
13.0/18.0	Low	3008	9.37	9.37	15.7	89	0.448	5.1	10.40	10.40	15.6	95	0.497	6.1	11.41	10.53	16.5	92	0.546	7.2
15.0/20.0	Low	3008	7.27	7.27	17.8	77	0.348	3.2	8.36	8.36	17.7	83	0.400	4.1	9.41	9.41	17.6	88	0.450	5.1

CHH20-6R制热参数表 CHH20-6R Heating Performance Table

CHH20-6R			20°C				21°C				22°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	3327	16.73	34.9	0.403	3.8	15.55	34.9	0.375	3.3	14.32	34.8	0.346	2.9
45.0/35.0	High	3327	22.54	40.1	0.545	6.3	21.42	40.1	0.518	5.7	20.25	40.1	0.490	5.2
50.0/40.0	High	3327	28.14	45.1	0.681	9.1	27.03	45.1	0.654	8.5	25.89	45.1	0.627	7.8
55.0/45.0	High	3327	33.63	49.9	0.816	12.2	32.53	50.0	0.789	11.5	31.39	50.1	0.761	10.8
60.0/50.0	High	3327	39.06	54.8	0.949	15.6	37.96	54.8	0.923	14.8	36.81	54.9	0.895	14.0
65.0/55.0	High	3327	44.45	59.6	1.082	19.2	43.35	59.6	1.056	18.4	42.20	59.7	1.027	17.6
40.0/30.0	Mid	3129	15.92	35.1	0.384	3.5	14.79	35.0	0.357	3.1	13.62	34.9	0.329	2.6
45.0/35.0	Mid	3129	21.44	40.3	0.518	5.7	20.35	40.3	0.492	5.2	19.25	40.3	0.465	4.8
50.0/40.0	Mid	3129	26.73	45.3	0.647	8.3	25.67	45.3	0.621	7.7	24.58	45.4	0.595	7.2
55.0/45.0	Mid	3129	31.93	50.2	0.775	11.1	30.87	50.3	0.749	10.5	29.79	50.3	0.723	9.9
60.0/50.0	Mid	3129	37.07	55.1	0.901	14.2	36.01	55.1	0.875	13.5	34.92	55.2	0.849	12.8
65.0/55.0	Mid	3129	42.17	59.9	1.027	17.5	41.11	60.0	1.001	16.8	40.02	60.0	0.974	16.0
40.0/30.0	Low	3001	15.38	35.2	0.371	3.3	14.29	35.1	0.344	2.9	13.16	35.0	0.318	2.5
45.0/35.0	Low	3001	20.69	40.4	0.500	5.4	19.65	40.4	0.475	4.9	18.59	40.4	0.449	4.5
50.0/40.0	Low	3001	25.79	45.4	0.624	7.8	24.77	45.5	0.600	7.3	23.72	45.5	0.574	6.7
55.0/45.0	Low	3001	30.79	50.4	0.747	10.4	29.78	50.4	0.722	9.8	28.73	50.5	0.697	9.2
60.0/50.0	Low	3001	35.73	55.3	0.868	13.3	34.72	55.3	0.844	12.7	33.68	55.4	0.818	12.0
65.0/55.0	Low	3001	40.64	60.1	0.990	16.4	39.63	60.2	0.965	15.7	38.58	60.2	0.939	15.0


CHH20-6R			23°C				24°C				25°C			
进/出水温 Water Inlet / Outlet Temp.	风机档位 Fan Speed	风量 Air Flow	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop	制冷量 Cooling Capacity	出风温度 Air Outlet Temp.	水流量 Water Flow	水压降 Water Pressure Drop
°C/°C		m ³ /h	kW	°C	l/s	kPa	kW	°C	l/s	kPa	kW	°C	l/s	kPa
40.0/30.0	High	3327	13.08	34.7	0.316	2.5	11.79	34.6	0.285	2.0	10.47	34.4	0.253	1.7
45.0/35.0	High	3327	19.11	40.1	0.462	4.7	17.94	40.1	0.433	4.2	16.78	40.1	0.405	3.7
50.0/40.0	High	3327												

Electricity Parameter

MODEL NO	Max Power Input (W)			Max Current (A)		
	Hi	Mid	Low	Hi	Mid	Low
CHH06	325	270	250	1.60	1.37	1.28
CHH08	360	350	320	1.80	1.70	1.60
CHH10	600	500	400	3.00	2.50	2.00
CHH12	650	540	500	3.20	2.74	2.56
CHH14	720	700	640	3.60	3.40	3.20
CHH16	720	700	640	3.60	3.40	3.20
CHH18	740	440	540	3.60	3.30	2.80
CHH20	820	720	600	4.20	3.60	3.00
CHH24	1200	1000	800	6.00	5.00	4.00
CHH30	1400	1160	1000	7.00	5.80	5.00
CHH35	1800	1220	1000	9.40	6.00	5.00

Dimensions with Return Air Plenum

MODEL NO	DIMENSIONS (mm)				NUMBER OF		NET WT(kg)	
	AIR FLOW	LENGTH	WIDTH	HEIGHT	FAN	MOTOR		
CHH06		762	610	430	512	1	1	30
CHH08		762	736	430	512	1	1	35
CHH10		762	838	430	614	1	1	41
CHH12		762	965	430	841	2	2	55
CHH14		762	1092	430	868	2	2	62
CHH16		762	1219	430	995	2	2	68
CHH18		762	1346	450	1122	2	2	74
CHH20		762	1448	450	1224	2	2	81

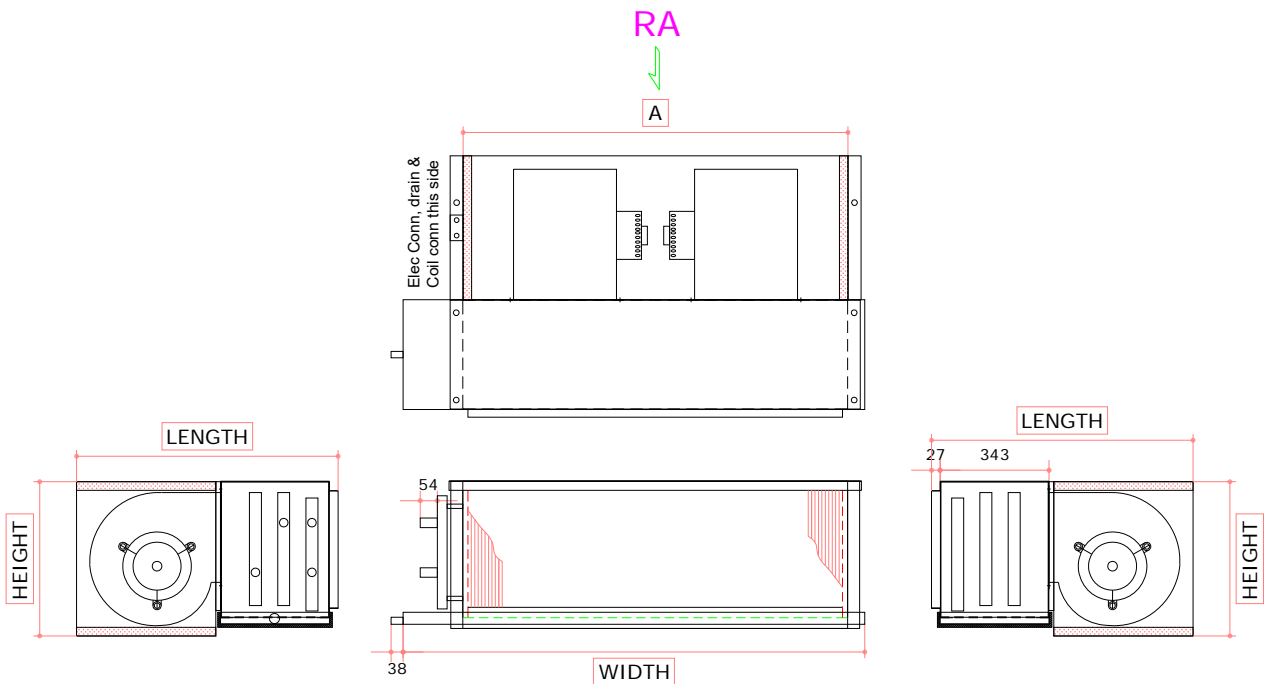

Cold Magic Efatar (HK) Co., Limited.

Address: Room 1105-1106, 11/F., Fo Tan Industrial Centre, 26-28 Au Pui Wan Street, Fotan N.T., Hong Kong

Tel: 852-2606 6922

Fax: 852-2693 1321

e-mail: coldmagic@cold-magic.com

Web site: www.cold-magic.com